





Shown actual size: Skylark Contour C•L dimmer and 1-gang Claro wallplate in White






Product family features

- Rocker switch returns light to light level indicated by slider
- Slide up to brighten, down to dim
- C•L, reverse-phase, and eco-dim models available
- Coordinating Claro wallplates only available separately
- Custom engraving available for wallplates; see p. 223

Control types

-  Single-pole (one location)
-  3-way or 4-way (two or more locations)

Direct load type compatibility

-  Dimmable LED/CFL lighting (screw-base)
-  Incandescent/halogen lighting
-  Magnetic low-voltage lighting
-  Electronic low-voltage lighting
-  Ceiling fans

Lighting load interfaces are not compatible with this family.

Available finishes

Use **BOLD** color code in model number (Example: CT-600P-**IV**)

Gloss*



WH
White



LA
Light Almond



AL
Almond



IV
Ivory



GR
Gray



BR
Brown



BL
Black

Metal wallplates**



SS
Stainless Steel

* Coordinating wallplates only available separately. For wallplate information, see pp.222–223.

** Stainless Steel metal wallplate only available separately and includes black plastic trim/adaptor, visible from side. Match with separate Black (BL) control. For wallplate information, see pp.222–223.

Dimmers with on/off switch



- Rocker switch returns light to light level indicated by slider
- C•L dimmer provides reliable dimming of dimmable LEDs/CFLs, as well as halogens and incandescents

Dimmable LED/CFL (screw-base) dimmer

Incandescent/halogen dimmer

C•L dimmer with on/off switch*

3-way/single-pole	CTCL-153P- XX ¹
120V 150W (LED/CFL), 600W (Inc)	

Visit lutron.com/compatibility for an approved list of dimmable LED bulbs. See p. 250 to calculate wattage when mixing lamp types.

Adjustable low-end trim.

Dimmable LED/CFL (screw-base) dimmer

Incandescent/halogen dimmer

Electronic low-voltage dimmer

Reverse-phase dimmer with on/off switch*^{**}

3-way/single-pole	CTRP-253P- XX ¹
120V 250W (LED/CFL), 500W (Inc), 500W (ELV)	

When dimming LEDs/CFLs, only bulbs marked or rated as dimmable with reverse-phase may be used.

Visit lutron.com/LEDs for an approved list of dimmable LED bulbs. See p. 251 to calculate wattage when mixing lamp types.

XX¹: Gloss color codes, see p. 57

XX²: Available in Gloss White (WH), Ivory (IV), Almond (AL), and Light Almond (LA)

Wallplates not included. Order separately, see pp. 222–223

Incandescent/halogen dimmers

Dimmer with on/off switch*

Single-pole	CT-600P- XX ¹
120V 600W	
3-way	CT-603P- XX ¹
120V 600W	

eco-dim dimmer[†] with on/off switch*

Multi-location/single-pole	CT-603PG- XX ²
120V 600W	

Incandescent/halogen dimmer

Magnetic low-voltage dimmer

Dimmer with on/off switch*

3-way/single-pole	CT-103P- XX ¹
120V 1000W (Inc), 600VA/450W (MLV)	

The stated VA (volt-ampere) rating includes the magnetic transformer heat losses and the lamp load.

The stated W (watt) rating is the maximum lamp wattage based on assumed 20% transformer loss.

Electronic low-voltage dimmer

Dimmer with on/off switch*^{**}

3-way/single-pole	CTELV-303P- XX ¹
120V 300W	

All models must be derated if ganged unless otherwise noted, see pp. 250–251 and 254–257.

* Minimum load required, visit lutron.com/faq for more information

** **Requires neutral wire connection**

† Maximum light output of 85% guarantees 15% energy savings over standard switches

Slide-to-off dimmer



- Slide up to on/brighten; down to dim/off
- Provides reliable dimming of dimmable LEDs/CFLs, as well as halogens and incandescents

Fan control



- Rocker switch returns fan to speed level indicated by slider
- Slide up to increase speed, down to decrease speed
- 3 quiet fan speeds for increased comfort
- For use with only one ceiling paddle fan
- Designed to prevent motor hum

 **Dimmable LED/CFL (screw-base) dimmer**

 **Incandescent/halogen dimmer**

Slide-to-off C•L dimmer*

Single-pole CTCL-150H-**XX**¹
120V 150W (LED/CFL),
600W (Inc)

Visit lutron.com/compatibility for an approved list of dimmable LED bulbs. See p.250 to calculate wattage when mixing lamp types.
Adjustable low-end trim.

 **Fan control**

Fan control—quiet 3-speed

3-way/single-pole CTFSQ-F-**XX**²
120V 1.5A

No derating required if ganged.

XX¹: Available in Gloss White (WH), Ivory (IV), and Light Almond (LA)

XX²: Gloss color codes, see p. 57


Wallplates not included. Order separately, see pp. 222–223

All models must be derated if ganged unless otherwise noted, see pp.250.

* Minimum load required, visit lutron.com/faq for more information


Connections overview

Load connections*


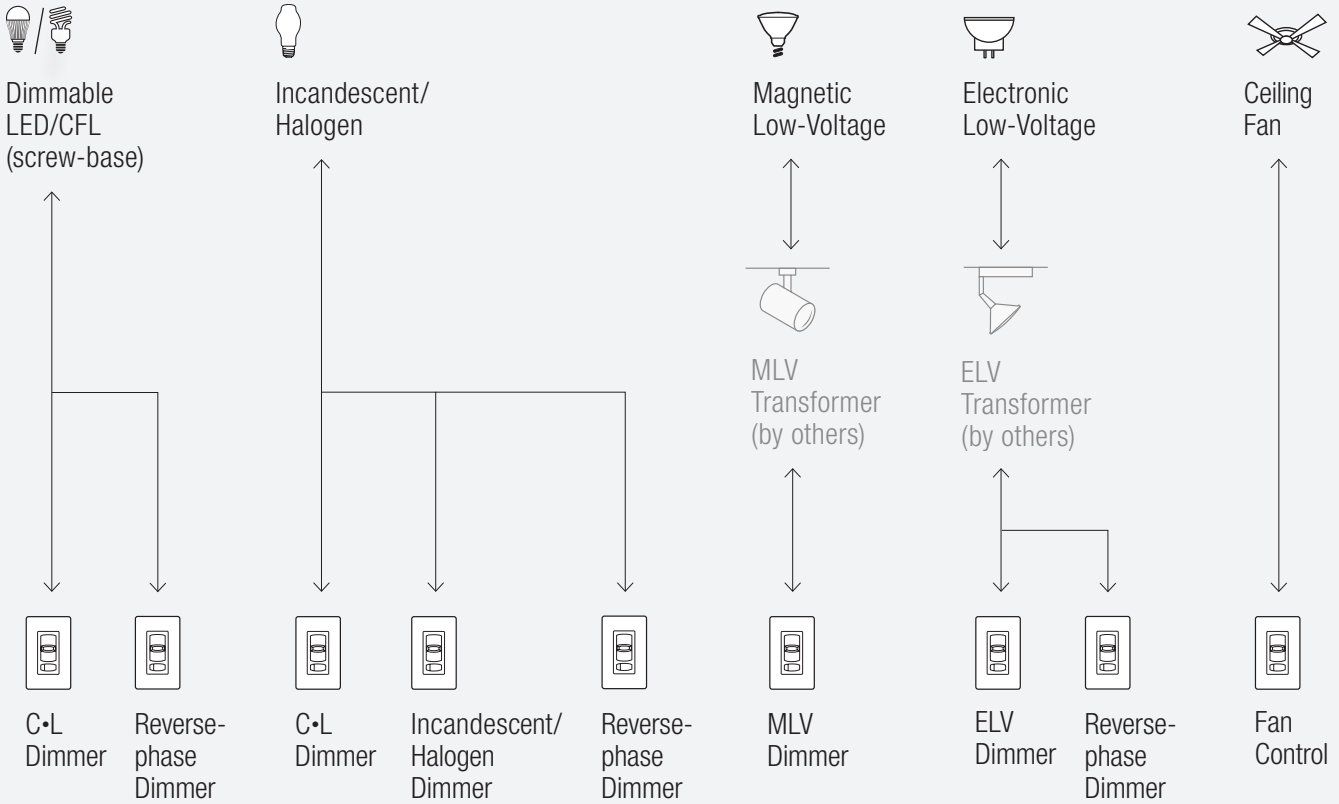


Control types (for 2 or more locations)

Dim from one location, switch from the others

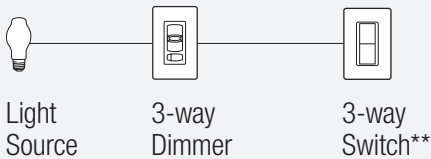

Fan control from one location, switch from the other

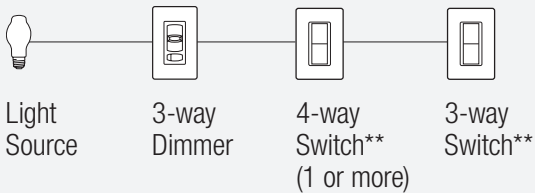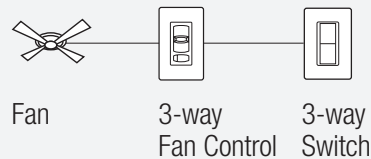

* **For illustration purposes only.** Consult model number pages for specific voltage and capacity information.
 ** For 3-way and 4-way control, use a 3-way dimmer/fan control with mechanical 3-way or 4-way switches.