


**Available finishes**


Use **BOLD** color code in model number (Example: SC-1-**PL**)

Gloss

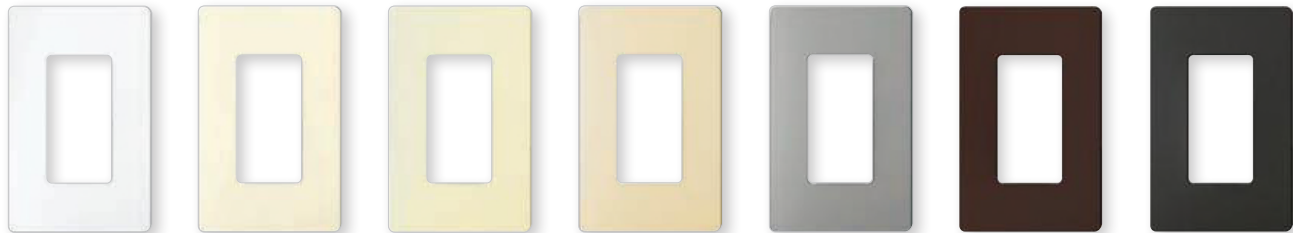


**WH** White      **LA** Light Almond      **AL** Almond      **IV** Ivory      **GR** Gray      **BR** Brown      **BL** Black

Satin Colors

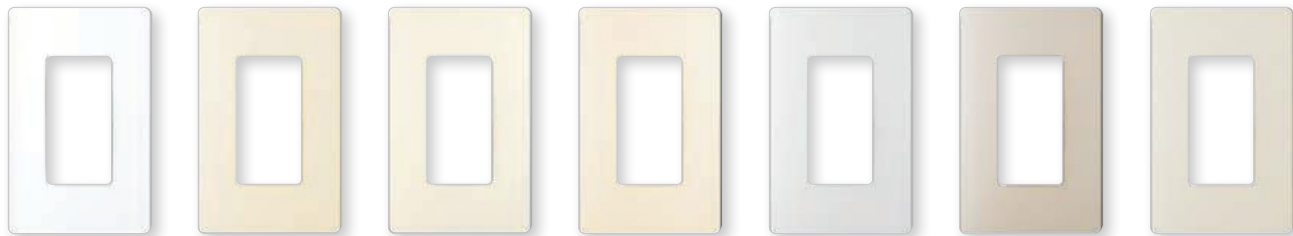

**SW** Snow      **LS** Limestone      **BI** Biscuit      **ES** Eggshell      **PD** Palladium      **TP** Taupe      **ST** Stone

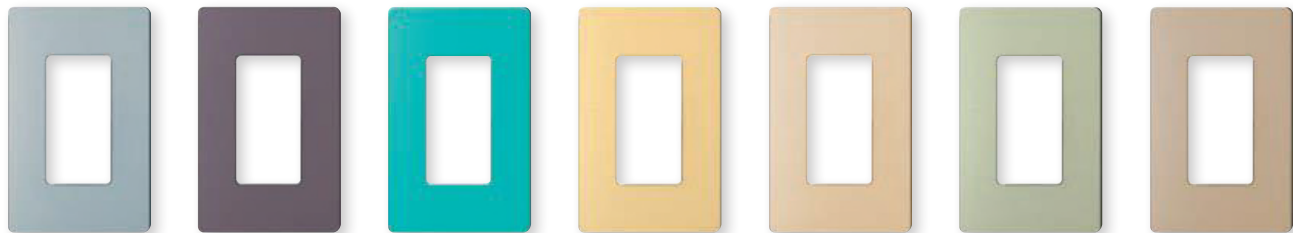

**BG** Bluestone      **PL** Plum      **TQ** Turquoise      **GS** Goldstone      **DS** Desert Stone      **GB** Greenbriar      **MS** Mocha Stone

Metal\*



**TC** Terracotta      **SI** Sienna      **HT** Hot      **MR** Merlot      **MN** Midnight      **SS** Stainless Steel

\* Stainless Steel metal wallplates include black plastic trim/adaptor, visible from side. Match with separate Black (BL) or Midnight (MN) controls and accessories.

**Wallplates for Caséta Wireless, Diva, Luméa, Maestro, Maestro Wireless, Pico wireless, Skylark, Skylark Contour, and Vive Maestro Wireless controls, and Claro, Satin Colors, and Vive accessories**



1-gang<sup>\*,\*\*</sup>

CW-1-**XX**<sup>1</sup>  
SC-1-**XX**<sup>2</sup>


W: 2.94 in (75 mm); H: 4.69 in (119 mm)  
P: .30 in (7.6 mm)



4-gang<sup>\*,\*\*</sup>

CW-4-**XX**<sup>1</sup>  
SC-4-**XX**<sup>2</sup>

W: 8.37 in (213 mm); H: 4.69 in (119 mm);  
P: .30 in (7.6 mm)



2-gang<sup>\*,\*\*</sup>

CW-2-**XX**<sup>1</sup>  
SC-2-**XX**<sup>2</sup>

W: 4.75 in (121 mm); H: 4.69 in (119 mm);  
P: .30 in (7.6 mm)



5-gang<sup>\*</sup>

CW-5-**XX**<sup>1</sup>  
SC-5-**XX**<sup>2</sup>

W: 10.18 in (259 mm); H: 4.69 in (119 mm);  
P: .30 in (7.6 mm)



3-gang<sup>\*,\*\*</sup>

CW-3-**XX**<sup>1</sup>  
SC-3-**XX**<sup>2</sup>

W: 6.56 in (167 mm); H: 4.69 in (119 mm);  
P: .30 in (7.6 mm)


**XX**<sup>1</sup>: Gloss and metal color codes,  
see p. 221

**XX**<sup>2</sup>: Satin Colors codes, see p. 221

Multi-gang dimmer installations may require derating, see pp. 251 and 254–257.

\* Stainless Steel metal wallplates include black plastic trim/adaptor, visible from side. Match with separate Black (BL) or Midnight (MN) controls and accessories.

\*\* **Bulk packaging available for Gloss colors. For more information, contact Customer Service at 1.888.LUTRON1.**

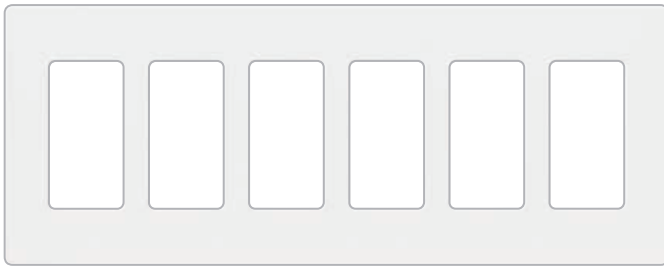


6-gang\* CW-6-**XX**<sup>1</sup>  
SC-6-**XX**<sup>2</sup>

W: 12.00 in (305 mm); H: 4.69 in (119 mm);  
P: .30 in (7.6 mm)

**Important note**

Multiple devices with line and low-voltage can be mounted behind a common wallplate using a standard barrier backbox. For more information consult Lutron Application Note #213, Combining Low-Voltage and Line Voltage Wiring Devices in a Multi-Gang Box at [lutron.com/applicationnotes](http://lutron.com/applicationnotes).



Custom engraving available for all Designer, Traditional, New Architectural, and Architectural style wallplates (except Stainless Steel). For wallplate engraving schedules, go to [lutron.com/engraving](http://lutron.com/engraving).

Multi-gang dimmer installations may require derating, see pp. 251 and 254–257.

\* Stainless Steel metal wallplates include black plastic trim/adaptor, visible from side. Match with separate Black (BL) or Midnight (MN) controls and accessories.

**Cable jacks**



- F-style, 75-Ohm coaxial cable
- Wallplate sold separately

Single cable jack CA-CJ-**XX**<sup>3</sup>  
SC-CJ-**XX**<sup>2</sup>

**Telephone jacks**



- 6-conductor telephone jack, RJ11
- Wallplate sold separately

Single telephone jack CA-PJ-**XX**<sup>3</sup>  
SC-PJ-**XX**<sup>2</sup>

**XX**<sup>1</sup>: Gloss and metal color codes, see p. 221

**XX**<sup>2</sup>: Satin Colors codes, see p. 221

**XX**<sup>3</sup>: Gloss color codes, see p. 221

### 6-port frame



- Shipped with six blanks in matching colors
- Connectors and wallplate sold separately
- Connectors snap in (no tools required)
- Connectors available in White (WH), unless noted

#### Field customizable 6-port frame

6-port frame	CA-6PF- <b>XX</b> <sup>1</sup> SC-6PF- <b>XX</b> <sup>2</sup>
--------------	--

### Connectors for 6-port frame



#### Telephone/network jacks

8-conductor, RJ45 category 5e	CON-1P-C5E- <b>XX</b> <sup>3</sup>
8-conductor, RJ45 category 6	CON-1P-C6- <b>XX</b> <sup>3</sup>



#### Fiber jacks

MT-RJ feed through	CON-1F-MTRJ-WH
SC simplex	CON-1F-SC-WH
LC non-flush mount	CON-1F-LC-WH
ST-style	CON-1F-ST-WH



#### Cable jack

F-style, 75-Ohm coaxial cable	CON-1C- <b>XX</b> <sup>3</sup>
-------------------------------	--------------------------------



#### BNC jack

BNC connector, 50-Ohm	CON-1B-WH
-----------------------	-----------

Connectors only for use with 6-port frame.

### Receptacles



- Tamper-resistant receptacles include tamper resistant shutter mechanism (shutters are white)
- Wallplate sold separately

#### Receptacles

15A 125V	CAR-15- <b>XX</b> <sup>1</sup> SCR-15- <b>XX</b> <sup>2</sup>
20A 125V	SCR-20- <b>XX</b> <sup>2</sup>

#### Tamper-resistant receptacles

15A 125V	CARS-15-TR- <b>XX</b> <sup>1</sup> SCRS-15-TR- <b>XX</b> <sup>2</sup>
20A 125V	SCRS-20-TR- <b>XX</b> <sup>2</sup>

### USB receptacles



- Includes two USB ports
- Ports are rated for a minimum of 10,000 insertions and removals
- Wallplate sold separately

#### Tamper-resistant USB receptacles

15A 125V	CAR-15-UBTR- <b>XX</b> <sup>1</sup> SCR-15-UBTR- <b>XX</b> <sup>2</sup>
----------	--

**XX**<sup>1</sup>: Gloss color codes, see p. 221  
**XX**<sup>2</sup>: Satin Colors codes, see p. 221  
**XX**<sup>3</sup>: Available in White (WH) and Black (BL)

**GFCI Receptacles**



- Self-testing technology allows GFCI to automatically check proper operation every 30 seconds
- LEDs indicate status of GFCI protection function
- Press reset button to reset GFCI after circuit interruption
- Wallplate sold separately

**Tamper-resistant, self-testing GFCI receptacles**

15A 125V, GFCI	CAR-15-GFST- <b>XX</b> <sup>1</sup> SCR-15-GFST- <b>XX</b> <sup>2</sup>
20A 125V, GFCI	SCR-20-GFST- <b>XX</b> <sup>2</sup>

**Receptacles for dimming use**



- Duplex for dimming both connected loads
- Projecting nubs prevent standard plugs from being used
- Requires replacement plug for dimming table and floor lamps
- Tamper-resistant shutter mechanism
- Wallplate sold separately

**Dual dimming, tamper-resistant receptacles**

15A 120/125V	CAR-15-DDTR- <b>XX</b> <sup>1</sup> SCR-15-DDTR- <b>XX</b> <sup>2</sup>
20A 120/125V	CAR-20-DDTR- <b>XX</b> <sup>1</sup> SCR-20-DDTR- <b>XX</b> <sup>2</sup>

**Receptacles for half dimming use**



- Top half for dimming
- Projecting nub prevents standard plug from being used
- Requires replacement plug for dimming table and floor lamps
- Bottom half is a general use receptacle and will fit standard duplex plugs
- Tamper-resistant shutter mechanism
- Wallplate sold separately

**Half dimming, tamper-resistant receptacles**

15A 120/125V	CAR-15-HDTR- <b>XX</b> <sup>1</sup> SCR-15-HDTR- <b>XX</b> <sup>2</sup>
20A 120/125V	CAR-20-HDTR- <b>XX</b> <sup>1</sup> SCR-20-HDTR- <b>XX</b> <sup>2</sup>

**XX**<sup>1</sup>: Gloss color codes, see p. 221  
**XX**<sup>2</sup>: Satin Colors codes, see p. 221

**Replacement plug for dimming**



- This plug required for use with Lutron receptacles for dimming use—plug will also work in standard receptacle
- Easily replaces the existing plugs on lamps

**Replacement dimming plugs**

120/125V	RP-FDU-10- <b>XX</b> <sup>1</sup>
UL/CSA/NOM regulatory approvals.	

**Important notes**

- Receptacles and plugs for dimming use are UL Listed for use with all Lutron wallbox dimmers included in this catalog.
- If there is only one electrical feed to the receptacle, then the duplex DFDU must be used.
- If the hot and dimmed hot feeds to the split duplex HFDU are supplied from different circuits or split-wired with separate switch-legs, a means to simultaneously disconnect these circuits must be provided at the panel board where they originate (NEC 210.7(C) 2002 Edition). A 2-pole circuit breaker or two single-pole circuit breakers with an approved handle tie can be used to accomplish this simultaneous disconnect. Feed-through dimming panels, which are those without breakers, are recommended when using the HFDU.
- For more information on dimming lamps consult Lutron Application Note #109, Guide to Dimming Portable Lamps via Receptacles, at [lutron.com/applicationnotes](http://lutron.com/applicationnotes).

**Mechanical switches**



- Paddle turns on/off
- Use with any 15A load
- General purpose switching of all sources and motor loads
- No derating if ganged
- Wallplate sold separately

**General purpose switches**

Single-pole*	CA-1PS- <b>XX</b> <sup>2</sup>
120/277V 15A	SC-1PS- <b>XX</b> <sup>3</sup>
3-way*	CA-3PS- <b>XX</b> <sup>2</sup>
120/277V 15A	SC-3PS- <b>XX</b> <sup>3</sup>
4-way	CA-4PS- <b>XX</b> <sup>2</sup>
120/277V 15A	SC-4PS- <b>XX</b> <sup>3</sup>

**General purpose switches with locator light**

Single-pole	CA-1PSNL- <b>XX</b> <sup>4</sup>
120V 15A	SC-1PSNL- <b>XX</b> <sup>5</sup>
3-way	CA-3PSNL- <b>XX</b> <sup>4</sup>
120V 15A	SC-3PSNL- <b>XX</b> <sup>5</sup>
4-way	CA-4PSNL- <b>XX</b> <sup>4</sup>
120V 15A	SC-4PSNL- <b>XX</b> <sup>5</sup>

**XX**<sup>1</sup>: Available in White (WH) and Brown (BR)

**XX**<sup>2</sup>: Gloss color codes, see p. 221

**XX**<sup>3</sup>: Satin Colors codes, see p. 221

**XX**<sup>4</sup>: Available in Gloss Almond (AL), Ivory (IV), Light Almond (LA) and White (WH)

**XX**<sup>5</sup>: Available in Satin Colors Biscuit (BI), Eggshell (ES), Goldstone (GS), Limestone (LS), Sea Glass (SG), and Snow (SW)

\* **Bulk packaging available for gloss colors. For more information, contact Customer Service at 1.888.LUTRON1.**